



GAMMON TECHNICAL PRODUCTS, INC.
P.O. BOX 400 - 2300 HWY 34
MANASQUAN, N.J. 08736

PHONE 732-223-4600
FAX 732-223-5778
WEBSITE www.gammontech.com
STORE www.gammontechstore.com

**STATIC BONDING
CABLE REEL**

**BULLETIN 163
(8-11)**

NEXT GENERATION STATIC BONDING CABLE REEL 4-WAY MOUNTING BRACKET


SMALL
DURABLE
INEXPENSIVE
HIGH CAPACITY

MANUAL REWIND
ADJUSTABLE TENSION
LIGHTWEIGHT
RUST-FREE BRACKETS

The simplest form of static cable reel is the manual rewind design. This simple reel incorporates all the features you want - and need.

CONSTRUCTION:

- Static conductive nylon discs
- Aluminum hub with conductive corrosion protection
- Stainless axle, and bracket guide
- 1/8" OD cable - over 200'
- 3/16" OD cable - over 100'
- Height: 9 5/8"
- Width: 6 3/8"
- Depth: 9"
- Mounting plate: 7" x 2"
- Weight (without cable): 5 lbs.

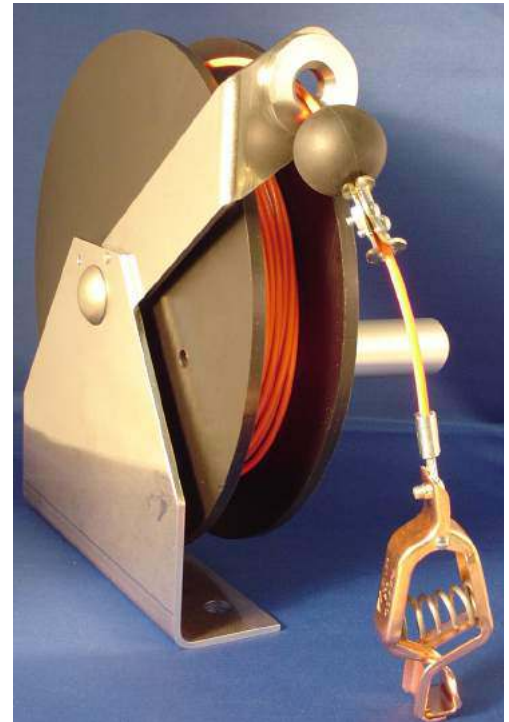

HOW TO ORDER

GTP - 9394 - ☐ - (☐ / ☐ - ☐ - ☐) - ☐

RH - Right-hand
LH - Left-hand

LENGTH - not to
exceed capacity

LENGTH "Y" - not
to exceed capacity

Combined cable length not to exceed
drum capacity:

DIAMETER	LENGTH
1/8"	200'
5/32"	150'
3/16"	100'

CABLE TYPE/COLOR (SEE BULLETIN 98)

- C - Clear plastic (only 1/8" & 3/8" diameter)
- D - Day-Glo red (only 1/8" & 3/8" diameter)
- E - Yellow Hytrel (only 5/32" diameter)
- F - Yellow vinyl (only 1/8" & 5/32" diameter)
- H - High-visibility orange (only 1/8" & 3/16" diameter)
- O - Super duty orange (only 3/16" diameter)
- T - Super duty clear (only 1/8" diameter)

CABLE DIAMETER

- 2 - 1/8" diameter
- 3 - 3/16" diameter
- 4 - 5/32" diameter

CABLE END (SEE BULLETIN 55)

- 1B- Grounding plug
(brass, GTP-1097B)
- 1S- Grounding plug
(stainless steel, GTP-1097S-1)
- 2 - Super clamp
(GTP-1101)
- 3 - Clip
(standard GTP-1096C)
- 4 - Other clip
(to be specified by customer)

EXAMPLE: GTP-9394-(65/15-D-2)-3

- Right-hand reel
- Length is 65' with a 15' Y branch as shown
- Color is Day-Glo red with a 1/8" diameter
- Cable and GTP-1096C clip included

